


Bonded Seals

1. Figure GM500 Self-centering

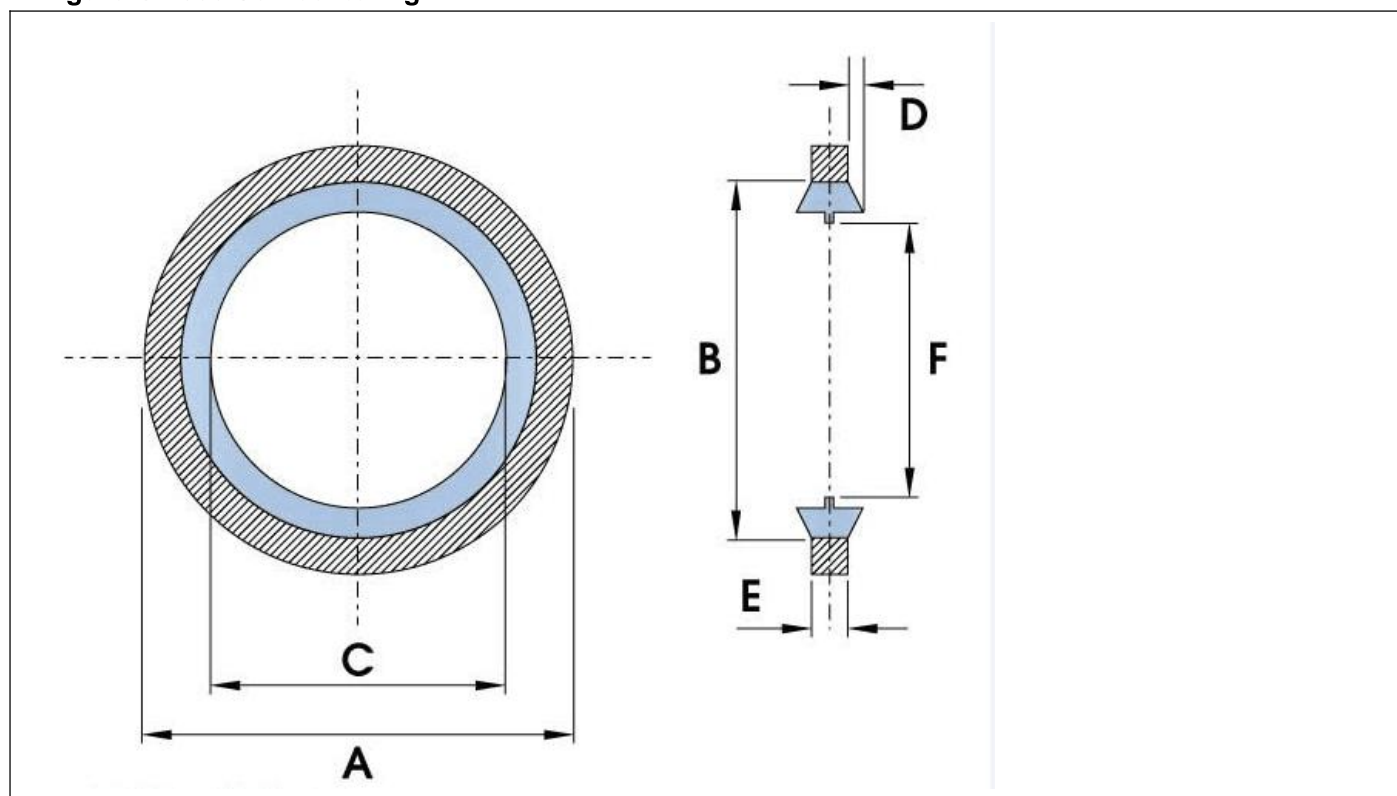

2. GM500 Self-centering range metric dimensions

Metric Thread size	Inside Diameter	Outside Diameter	Metal thickness	Metal washer ID	ID between self centering
	C	A	E	B	F
PPM6	6,50	10,00	1,00	8,00	5,60
PPM8	8,5	14,00	1,00	10,40	6,40
PPM10	10,50	16,00	2,00	12,40	8,05
PPM12	12,50	18,00	1,50	14,10	9,73
PPM14	14,5	20,00	2,00	16,40	11,38
PPM16	16,5	22,00	2,00	18,40	13,41
PPM18	18,5	25,00	2,00	20,40	14,76
PPM20	20,5	28,00	2,00	22,50	16,76
PPM22	22,5	30,00	2,00	24,40	18,74
PPM24	24,5	32,00	2,00	26,40	20,11
PPM27	27,2	35,00	2,00	29,40	23,30
PPM30	30,7	38,00	2,00	32,40	25,70
PPM33	33,5	42,00	2,00	35,40	28,70

Bonded Seals

Metric Thread size	Inside Diameter	Outside Diameter	Metal thickness	Metal washer ID	ID between self centering
	C	A	E	B	F
PPM36	36.7	46,00	2,00	38,70	31.1
PPM39	41.9	51,00	2,00	40,00	34.1
PPM42	42.7	53,00	2,00	45,70	38.7
PPM48	48.7	60,00	2,00	51,70	43.7
PPM52	52.9	66,00	2,00	56,40	46
PPM60	60.9	75,00	2,00	63,00	-

3. GM500 Self-centering range inch dimensions, BSP

BSP thread size	Inside Diameter	Outside Diameter	Metal thickness	Metal washer ID	ID between self centering
	C	A	E	B	F
1/8 BSP	10,37	15,88	2,00	11,84	8,26
1/4 BSP	13,74	20,57	2,00	15,21	11,18
3/8 BSP	17,28	23,80	2,00	18,75	14,76
1/2 BSP	21,54	28,58	2,50	23,01	18,24
3/4 BSP	27,05	34,93	2,50	28,53	23,83
1 BSP	33,89	42,80	3,20	36,88	29,92
1 1/4 BSP	42,93	52,38	3,20	45,93	38,45
1 1/2 BSP	48,44	58,60	3,20	51,39	44,45
2 BSP	60,58	73,03	3,20	63,63	56,26

